




THE WORLD'S LEADING MANUFACTURER OF LABEL DISPENSERS, REWINDERS, UNWINDERS & COUNTING SOLUTIONS

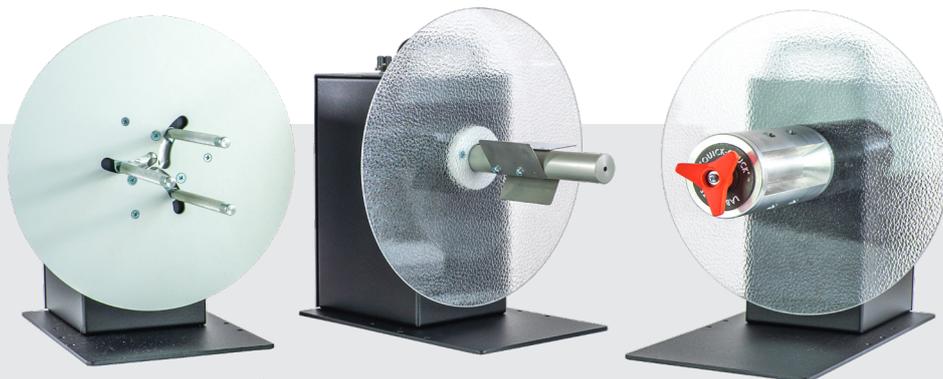

## UNPOWERED UNWINDER UCAT-1

# Unpowered Label Unwinders


## HEAVY-DUTY UNWINDERS UCAT-1

Label unwinders provide a convenient way to **manage your supply roll of labels** as it feeds into a printer. You can use larger rolls of labels to minimize your unit label cost. The supply roll of labels does not have to be refreshed as often, **saving time and adding convenience**. External label rolls are always visible, making it easy to monitor the status of your label supply.

- ✓ Small footprint to fit on any desk
- ✓ Easy setup: attach the labels to the take-up core and ready to start
- ✓ Speed up to 125cm/sec to work with the fastest barcode printers available on the market
- ✓ Features adjustable speed/braking to align with printer
- ✓ Large capacity for roll diameters up to 300mm



UCAT-1-1-INCH

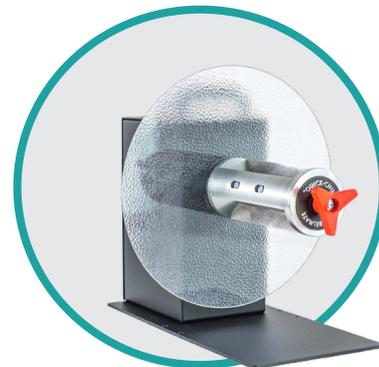

UCAT-1-CHUCK

## FEATURES

- The UCAT-1-Standard has a vane-style core Holder
- The UCAT-1-ACH employs an adjustable core holder enabling the use of varying core sizes, for maximum flexibility
- The CAT-1-CHUCK includes a quick-locking "Quick-Chuck" core chuck permitting the fastest loading and unloading of cores and label rolls
- CHUCK/STANDARD/10-INCHES models come standard for using cores in 76mm. On request available in 38/40/44/50/70 mm.
- Weight: 9.6 KG to 11.1 KG depending configuration
- Max. Label Roll Weight: STD: 8kg - ACH: 7kg - QC: 8KG - 10-IN: 10kg
- Max. Label Roll Diam: 300mm, 280mm for ACH, 220mm for 1-INCH

## UNPOWERED UNWINDERS UCAT-1

P/N	MODEL	DESCRIPTION	MAX LABEL WIDTH (mm)	MAX ROLL DIAM (mm)	MAX WEIGHT
LMU002	UCAT-1-STANDARD	Self-Powered-Adjustable Speed, Proportional Frictionless Braking. Standard for 76mm cores (38/40/44/50/70/100mm available)	155	300	8 KG
LMU003	UCAT-1-ACH	Self-Powered-Adjustable Speed, Proportional Frictionless Braking. Adjustable Core Holder for using any core diameter between 25 & 101 mm	155	280	7 KG
LMU004	UCAT-1-CHUCK	Self-Powered-Adjustable Speed, Proportional Frictionless Braking. Easy-Loading Quick-Chuck for 76mm cores (38/40/44/70/100mm available)	170 (optional 220 & 270)	300	10 KG
LMU005	UCAT-1-10-INCHES	Self-Powered-Adjustable Speed, Proportional Frictionless Braking. Standard for 76mm cores (38/40/44/50/70/100mm available)	255	300	10 KG
LMU006	UCAT-1-1-INCH	Self-Powered-Adjustable Speed, Proportional Frictionless Braking. For 25,4 mm (1") cores	155	220	8 KG

## OPTIONS


P/N	MODEL	DESCRIPTION
LMX457	R-16	Option available on UCAT-1-STANDARD and UCAT-1-CHUCK to accept rolls up to 400mm in diameter. Factory installed.
LMX579		UNIVERSAL- ALIGNMENT PLATE for any desktop Thermal Transfer and Inkjet color printer
LMX491	STANDARD SHAFT	Standard shaft for UCAT-1 with vanes, internal and external flanges.
LMX546	1' SHAFT	1-Inch shaft for UCAT-1 with vanes, internal and external flanges.
LMX492	10" -SHAFT	10-Inches shaft for UCAT-1 with vanes, internal and external flanges.
LMX500	ACH-SHAFT	Adjustable Core Holder for any core size from 25 to 101mm in diameter. With inner flange.

## GENERAL

- Limited Warranty of 5 Years



Your local partner:

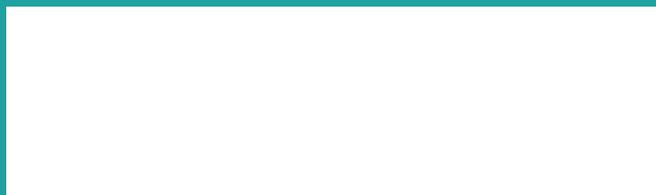

**+32 2 375 69 60**

**[brussels@labelmate.com](mailto:brussels@labelmate.com)**

Chaussée de Ruisbroek 290  
1620 Drogenbos (Belgium)

**[www.labelmate.com](http://www.labelmate.com)**